

Supports DVI -D Input/Output

5

Supports PS2-keyboard/mouse

or

- Supports USB- keyboard/mouse
- Option: Dualhead
- for distances up to 10.000m over Fibre-Cables
- 19" Rack mountable using 19" Rack Mount Kit (RMK)



DVIEXTENDER FOR PS2 OR USB SUPPORT USING FIBRE CABLES

DVXI/ET-xM DVXI/ET-xS

DVXi/ET-xM DVXi/ET-xS

DVI Extender low-cost for PS2 or USB support using FIBRE Cables

DVXi	- Digital KVM Extensio	n
with	no loss in image quality	

Use DVXi/ET to remotely locate you monitor, keyboard and mouse up to 10.000m from the CPU. Digital extension technology ensures perfect image quality no matter how far you extend!

Why does it make sense to remotely locate a CPU?

- Protection computes against dust, water and vibration.
- Avoid theft and protect against unauthorized installation of software.
- Simplify maintainence, configuration and administration of multiple users computers by co-locating them
- Save costs by installing air conditioning and high-speed networking equipment in a central server room
- Cut out noise in the work place

DVXi Applications

- Financial (remote users and server control)
- Call Centres (co-locate users computers))
- Industrial (protection against pollution)
- Information Terminals & Kiosks
- Airports (air traffic control, passenger information systems)
- KVM extension where exceptional image quality is required

Perhaps you have a safety critical application, where the user is not allowed to access to the CPU directly.

DVXi/LC-xC – The Future of KVM Extension

Power Supply

Dimensions

Upgradable

With Flat panel displays becoming more prevalent it is natural to drive them digitally through their DVI interface to obtain optimum image quality. DVXi/ET supports DVI extension up to resolutions of 1920x1200 to ensure the benefits of using DVI are maintained even if you locate your monitor 10.000m away.!

DVI, USB and more

DVXi- Extender supports DVI graphic interfaces (DVI-D) and, depending on device type either PS2- keyboard/mouse or USBkeyboard/mouse (HDI – Human Device Interface – in this class of devices you can also find Touch screen, Tableaus and other pointing or input devices)

Using a highly effective Compression algorithm, the maximum data rate of the fibre transfer is used best. Even on highest resolutions (1920x1200) you'll get a comfortable working and a smooth picture movement on videos. Comparing to other devices, the maximum transfer distance does not depend on the screen resolution! Even in the highest resolution of 1920x1200 you can easily bridge 10.000m.


The high-density design allows dense packing in 19" server racks. Up to 4 devices can be mounted into 19"/1U. Even, using it for a desktop application, it is very attractive!

Dual-Access for VGA (all models), keyboard and mouse (PS2 models only): in addition to the remote access, a Monitor, (keyboard and mouse) may be connected directly at the PC. So you can have two (dependent) access points to your CPU. Or you have a remote access to your CPU and several CPU's are connected locally through a Console Switch to a local Admin Operator Place

Highlights

- Top Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 @ 60Hz (1280 x 1024 @ 75Hz) on all distances up to the maximum distance
- User selectable: DCC-Information used from the remotely located Monitor, from the locally located Monitor or from an internal DDC-Table
- Basic device to remotely locate Monitor and Keyboard/Mouse
- Supports (depending on device type) PS2keyboard/mouse or USB (USB supports keyboard/mouse and all HID=Human interface device devices like Touch screen, Graphic Tablets, ...
- Dual-Access: in addition to the remote access, a Monitor (all models) and Keyboard/Mouse (PS2 models only!) may be connected directly at the PC
- Option: Dual-Head for PS2 and USB: Support for two displays at the workplace – for Dual Port Graphic Cards
- Audio/serial Option available
- Maximum Screen Resolution on all distances:
 - 200m @ Multimode 62,5 ?
 - 400m @ Multimode 50 ?
 - 10.000m @ Singlemode 9 ?
- Fibre-Plug type LC
- Compatible with all operating systems
- Compatible with all major KVM Switches
- Rack Mount options (19"): Mount up to 4 devices in a 19"/1U rack mount kit. This saves expensive rack space.

scanmagnetics_.com





ad

USB, Singlehead

DVI-D (SingleLink)

DVXi/ET-PM /-PS : PS2

Onboard Flash

DVI-D (SingleLink) – not HDCP comp

103 x 143 x 29 mm Singlehead

103 x 143 x 42 mm Dualhead

(19" rack brackets available)

1920x1200@60Hz, Resolution up to 1280x10

Universal Switchmode PSU (90-240V Inpu

(19" Rackmount Kit and plates available)

DVXi/ET-UM /-US : USB (keyboard/mouse support only

PS2, Singlehead

24 min. 75Hz

! (HID))

atible

t)



Supports DVI-D Input/Output

5

Supports PS2-keyboard/mouse

or

- Supports USB- keyboard/mouse
- Option: Dualhead
- for distances up to 140m over Cat5-Cables
- 19" Rack mountable using 19" Rack Mount Kit (RMK)



DVI EXTENDER FOR PS2 OR USB SUPPORT USING CATX CABLES









PS2, Singlehead


DVXi/ET-xC

support using Catx Cables

DVI Extender

for PS2 or USB



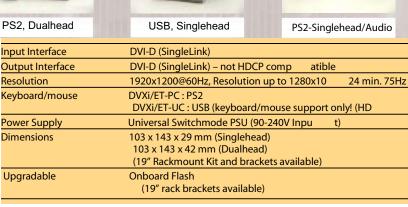

DVXi – Digital KVM Extension with no loss in image quality

Use DVXi/ET-xC to remotely locate you monitor, keyboard and mouse up to 140m from the CPU. Digital extension technology ensures perfect image quality no matter how far you extend!

Why does it make sense to remotely locate a CPU?

- Protection computes against dust, water and vibration.
- Avoid theft and protect against unauthorized installation of software.
- Simplify maintainence, configuration and administration of multiple users computers by co-locating them
- Save costs by installing air conditioning and high-speed networking equipment in a central server room
- Cut out noise in the work place

DVXi Applications

- Financial (remote users and server control)
- Call Centres (co-locate users computers))
- Industrial (protection against pollution)
- Information Terminals & Kiosks
- Airports (air traffic control, passenger information systems)
- KVM extension where exceptional image quality is required

Perhaps you have a safety critical application, where the user is not allowed to access to the CPU directly.

DVXi/ET-xC – The Future of KVM **Extension**

With Flat panel displays becoming more prevalent it is natural to drive them digitally through their DVI interface to obtain optimum image quality. DVXi/ET-xC supports DVI extension up to resolutions of 1920x1200 to ensure the benefits of using DVI are maintained even if you locate your monitor 140m away.!

DVI. USB and more

DVXi- Extender supports DVI graphic interfaces (DVI-D) and, depending on device type either PS2- keyboard/mouse or USBkeyboard/mouse (HDI - Human Device Interface - in this class of devices you can also find Touch screen, Tableaus and other pointing or input devices)

Using a highly effective Compression algorithm, the maximum data rate of the CatX transfer is used best. Even on highest resolutions (1920x1200) you'll get a comfortable working and a smooth picture movement on videos. Comparing to other devices, the maximum transfer distance does not depend on the screen resolution! Even in the highest resolution of 1920x1200 you can easily bridge 140m.

The high-density design allows dense packing in 19" server racks. Up to 4 devices can be mounted into 19"/1U. Even, using it for a desktop application, it is very attractive!

Dual-Access for VGA (all models), keyboard and mouse (PS2 models only): in addition to the remote access, a Monitor, (keyboard and mouse) may be connected directly at the PC. So you can have two (dependent) access points to your CPU. Or you have a remote access to your CPU and several CPU's are connected locally through a Console Switch to a local Admin Operator Place

Highlights

- Top Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 @ 60Hz (1280 x 1024 @ 75Hz) on all distances up to the maximum distance
- User selectable: DCC-Information used from the remotely located Monitor, from the locally located Monitor or from an internal DDC-Table
- Basic device to remotely locate Monitor and Kevboard/Mouse
- Supports (depending on device type) PS2keyboard/mouse or USB (USB supports keyboard/mouse and all HID=Human interface devices like Touch screen, Graphic Tablets ...
- Dual-Access: in addition to the remote access, a Monitor (all models) and Keyboard/Mouse (PS2 models only!) may be connected directly at the PC
- Option: Dual-Head for PS2 and USB: Support for two displays at the workplace for Dual Port Graphic Cards
- Audio/serial Option available
- Maximum Screen Resolution on all distances: • 140 m w/ regular Cat5 Cable
- Compatible with all operating systems
- Compatible with all major KVM Switches
- Rack Mount options (19"): Mount up to 4 devices in a 19"/1U rack mount kit. This saves expensive rack space.

<u>scanmagnetics_com</u>